


## Key Features:

- UL Rated
- 2 Hour Fire Rated
- Significant labour savings
- Maintenance free
- Wide range of floor/ceiling assemblies covered

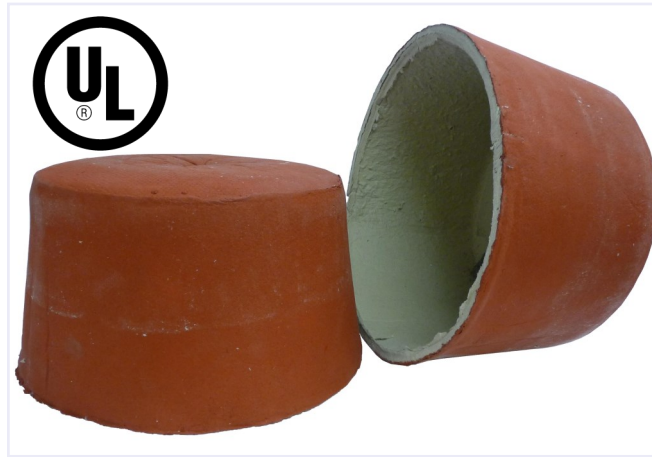

The **TENMAT** FF109X is the only two hour UL classified fire barrier that can be used with a wide range of recessed lights to effectively prevent the spread of fire through a ceiling opening.

The flexible and light weight enclosures are made out of fire resistant and intumescent materials which will be activated in case of a fire, stopping both flame spread and heat transmission for up to 2 hours.

## Availability

Cover Size (OD x Height)	Downlighter Cut-out Size	Downlighter Height
350 x 230 mm	145-270 mm	≤ 230 mm

## Test Data

Report Type	Fire Test Lab	Report Number	Test Standard	Fire Rating
Classification	UL	R25019/08NK20023	UL 263	120 mins
Classification (Canada)	UL	R25019/09SR4860448	UL 293	120 mins

## Fitting Instructions



- Position dark grey pad inside cover directly over can, and non-padded areas over junction box
- Cut four small slits at the bottom of the cover to fit over hanger bars
- Sit cover flush over the drywall or ceiling tile
- Install light to manufacturer's instructions
- To feed the wire through the side of the cover close to the junction box, poke wire through material or cut a small opening with a knife
- Check for secure fit and make sure cover overhangs the hanger bars. The bottom of the FF109X cover should be in full contact with the drywall/ceiling tile